

A.R.I. DC-501



Waterworks

Backflow Preventer - Double Check Valve


Description

A.R.I. DC-500 and DC-501, are Double Check Valves designed to provide maximum protection against backflow caused by back-siphonage or backpressure. Backflow may cause infiltration of chemicals, fertilizers and/or other pollutants into potable water systems. Comprised of two independent, easily replaceable, capsulated spring-loaded check valves.

Installation

- Chemical and fertilizer systems in landscape and irrigation.
- Swimming pools
- Small Business
- Private Homes
- According to local regulations

Features and Benefits

Easily replaceable modular parts	Simple, quick and inexpensive maintenance, low-cost repair parts
Construction materials	UV resistant, non-corrosive, scale resistant and durable
Lightweight and compact	Easy and quick installation, fits in confined spaces
 NSF/ANSI 61 Certified & Listed NSF/ANSI 372 Certified & listed	for Drinking Water System Component
	for Lead-Free product
Product Standards	ASSE 1015, AWWA C511, Watermark
USC - Authorized and Approved	USC - FCCHR: Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California

Technical Specifications

Size range	½", ¾", 1", 1 ¼", 1 ½", 2"
Working pressure range	150 psi
Testing pressure	1.5 times maximum working pressure
Temperature	Working temperature range : 33° F - 120° F Max intermittent temperature: 140° F



Upon ordering, please specify: model, size, working pressure, thread/flange standard and type of liquid

Valve Selection Options

Models	A.R.I. DC-500 Shut-off valves + connector A.R.I. DC-501 Shut-off valves with union connection
Valve connection	Threaded NPT - ANSI B1.20.1





Head Loss

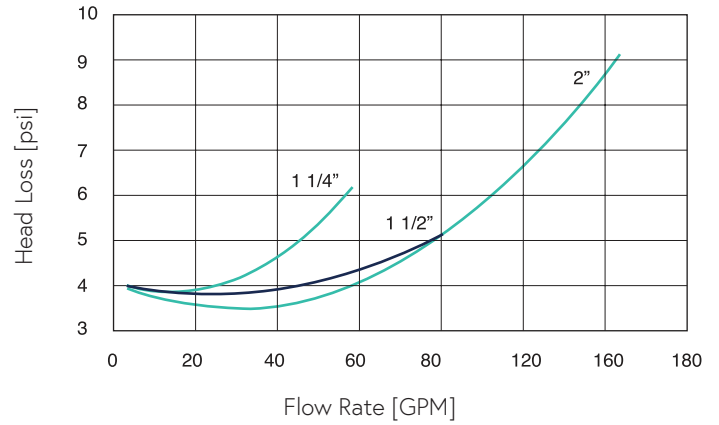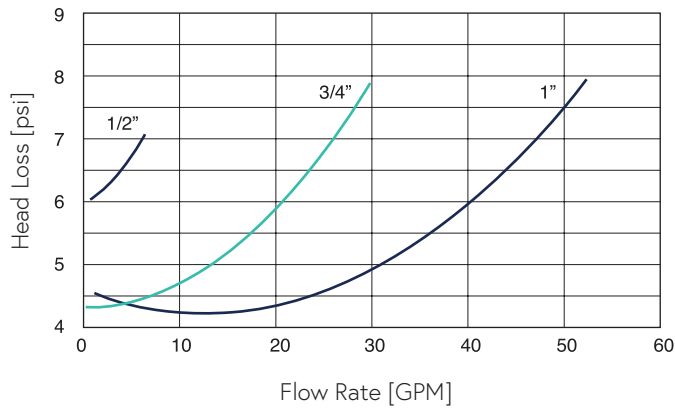

Dimensions and Weight


Size	Dimensions (Inch)			Weight
	A	B	C	Lbs.
A.R.I. DC-501				
1/2"	12.60	4.39	3.94	2.98
3/4"	12.60	4.39	3.94	2.96
1"	14.17	4.39	3.94	2.92
1 1/4"	18.27	6.57	5.91	7.23
1 1/2"	20.47	6.57	5.91	8.71
2"	22.83	6.57	5.91	8.85

A.R.I. DC-500				
1/2"	14.02	4.39	3.94	2.95
3/4"	14.02	4.39	3.94	2.93
1"	15.35	4.39	3.94	3.38
1 1/4"	19.69	6.57	5.91	7.69
1 1/2"	22.05	6.57	5.91	9.33
2"	23.62	6.57	5.91	9.71

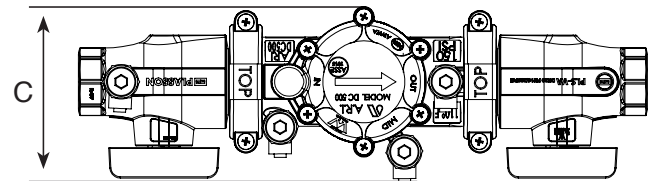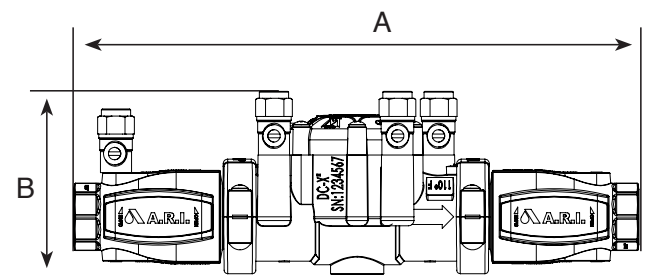

Parts List and Specifications

No.	Part	Material
1	Cover Assembly	
1a	Bolts	Stainless Steel 304
1b	Cover	Reinforced nylon
2	Check Valve Assembly	
2a	Inlet Check Valve	Acetal +Stainless Steel 302+EPDM
2b	Retainer	Acetal
2c	Outlet Check Valve	Acetal +Stainless Steel 302+EPDM
3	Body Assembly	
3a	Body	Reinforced nylon
3b	Test Cocks	Lead free Brass
3c	Band	Reinforced nylon
4	Ball Valve Assembly	
4a	Inlet Ball Valve + Test Cock	Reinforced nylon+ Lead free Brass
4b	Outlet Ball Valve	Reinforced nylon

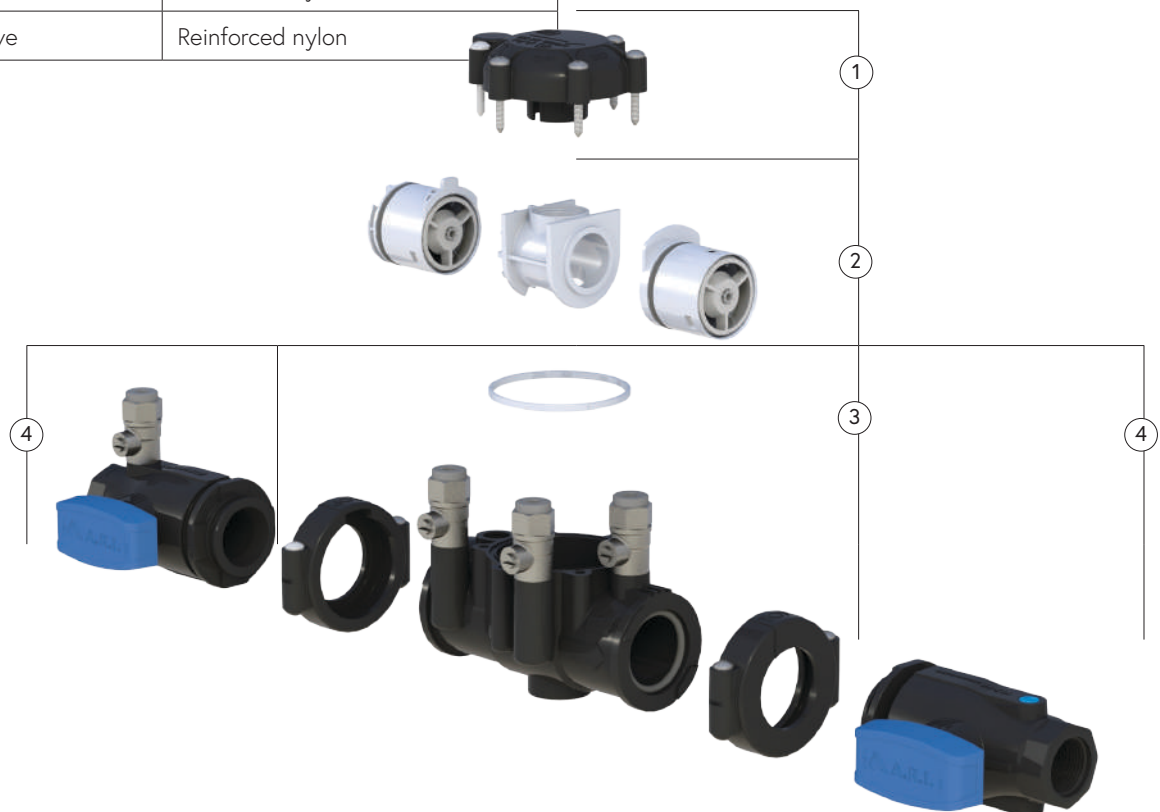

Aquestia Ltd. reserves the right to make product changes without prior notice. To ensure receiving updated information on parts specifications, please contact us at usa@aquestia.com. Aquestia Ltd. shall not be held liable for any errors. All rights reserved.