



Waterworks

Differential Float and Pressure Sustaining Valve

Operation

The Dorot Series 300 Differential Float and Pressure Sustaining Valve ('S300-FLDI / PS') is an automatic, float actuated and pressure sustaining pilot controlled valve. The valve will open and sustain a minimal required upstream-pressure when the level reaches a set opening height and close on a set lower / higher level. The differential between opening and closing levels is adjustable. In case the upstream pressure is lower than the set-value, the valve will keep a closed position, regardless of the water-level.

S300 Features

Superb performance

- Regulates at a stable mode, regardless of valve-size, down to near-zero flow. Thus, eliminating the need for a special low flow plug-design (such as 'V-port') or a bypass valve.
- 'Floating', low-friction internal-trim design, guided by a unique LPT® device.

High reliability

- All control ports are fitted with SST sleeves for preventing corrosion-blockage.
- Pre-shaped reinforced diaphragm – for easier assembly and improved longevity.

Reduced periodic inspection / maintenance labor

- The control-trim is fitted with a self-flushing, inline control-filter.
- Easy in-situ adjustment and maintenance.

Versatility

- A standard and simple single-chamber valve design, provides smooth operation. Conversion to a double chamber is a patented option.

Standard Materials

- Body & Cover – Ductile Iron
Optional – Cast Steel, SST, N.A.B, S.Duplex
- Main Internal – SST (1.5"-6), Coated Steel (8"-32")
Optional – Cast Steel, SST, N.A.B, S.Duplex
- Elastomers – EPDM
Optional – NBR, Neoprene, Viton or others
- Coating – Polyester, Epoxy / Optional – Halar and others
- Control Trim – Brass, PA / Optional – SST316, Duplex

Purchase Specifications

- The valve will be hydraulic, pilot-operated globe type.
- Face-to-face length dimension meets ISO 5752 Standard.
- The stem will be guided at the top by a replaceable guide bearing and at the bottom by a stainless steel unique LPT® device.
- The valve will regulate any flow within the specified range without the need for a smaller bypass valve or throttling plug.
- All control ports will be corrosion free protected by stainless steel 316 inserts.

Design Considerations

- The valve should be suited for the maximal flow and allowed Headloss.
- For low pressure systems, consider a 3-way control pilot.
- Large pressure differentials may cause cavitation damage. Consult Dorot for solutions if such conditions are expected.

Quick Sizing

- Valve sized to be the same as line-size or one nominal-size smaller.
- Maximum recommended flow velocity for continuous operation 5.5 m / sec (18 ft. / sec).


Pressure Rating

- Model 30, 30A for medium pressure (PN16 bar / 250 psi)
- Model 31, 31A for high pressure (PN25 bar / 360 psi)

Main Control System Components*

1. Main Valve
2. Ball Valve
3. Self-flushing Filter
4. 3W FLDI Pilot Valve
5. 3W Ball Valve
6. Orifice (Optional)
7. 31-10SD Pilot
8. Pressure Gauge

* Indicative drawing

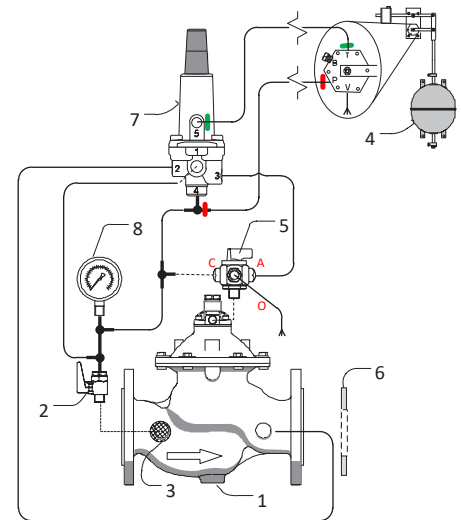

Typical Installation

Typical applications include a Differential Float Valve Model S300-FLDI / PS. The valve will open and sustain a minimal required upstream-pressure when the level reaches a set opening height and close on a set lower / higher level.

