

## Accessories



General representation



Fire  
Protection

## Pressure Reducing 2-Way Pilot Valve

### Description

A 2-Way, diaphragm actuated, spring-loaded pressure reducing pilot valve, applicable for service on pressure reducing, deluge and pre-action valve trims. The pilot modulates to maintain a steady, pre-set downstream pressure, regardless of upstream pressure or flow rate fluctuations. As downstream pressure falls below the set point, it opens a full passage between its "In" and "Out" ports, relieving the valve's control chamber to the downstream and allowing the valve to open. As downstream pressure rises above the set point, the CXPR throttles, restricting the flow out of the valve's control chamber, keeping its position or closing the valve (if necessary).

### Certification & Compliance

UL Listed (when installed on OCV control valves)



### Features & Benefits


- 2-way pilot valve for high accuracy pressure reducing applications
- Wide regulation range: a single spring is used for setting range of 3-19 bar / 45-275psi
- Superb accuracy and repeatability
- Integral stainless steel needle valve - highly accurate and simplifies the control trim
- No internal sealing allows for maximum dependability
- Easy to adjust



Low pressure



High pressure

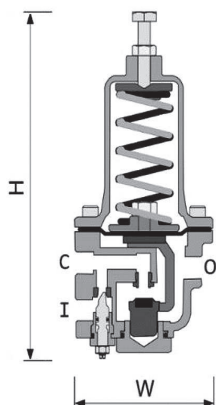

### Operation

General		
Pressure Rating	40 bar / 580psi	
Pressure Adjustment Range	0.3 -35 bar / 5-500psi	
Fluid Temperature	80°C max / 175°F max	
Weight	2.2 kg / 4.9 lbs	
Materials	Standard	Optional*
Body & Bonnet	Brass	Stainless Steel
Internal Parts	Stainless Steel	Stainless Steel
Spring	Stainless Steel	Stainless Steel
Elastomers	EPDM	NBR
Dimensions		
H (Height) max	215 mm / 8 <sup>23</sup> / <sub>50</sub> "	
W (Width)	84 mm / 3 <sup>31</sup> / <sub>100</sub> "	
Port	Size	Connection
I	1/4" NPT	Upstream
C	1/4" NPT	Control Chamber
O	1/4" NPT	Downstream
Spring Ranges	psi	bar
53 (Standard)	45-275	3-19
125	215-500	15-35
108	5-50	0.3-3.5

\*Other materials available upon request. Minimum quantities may apply.